TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame
UMA 71G-2
0.55 kW / 0.75 Cv
2800 RPM

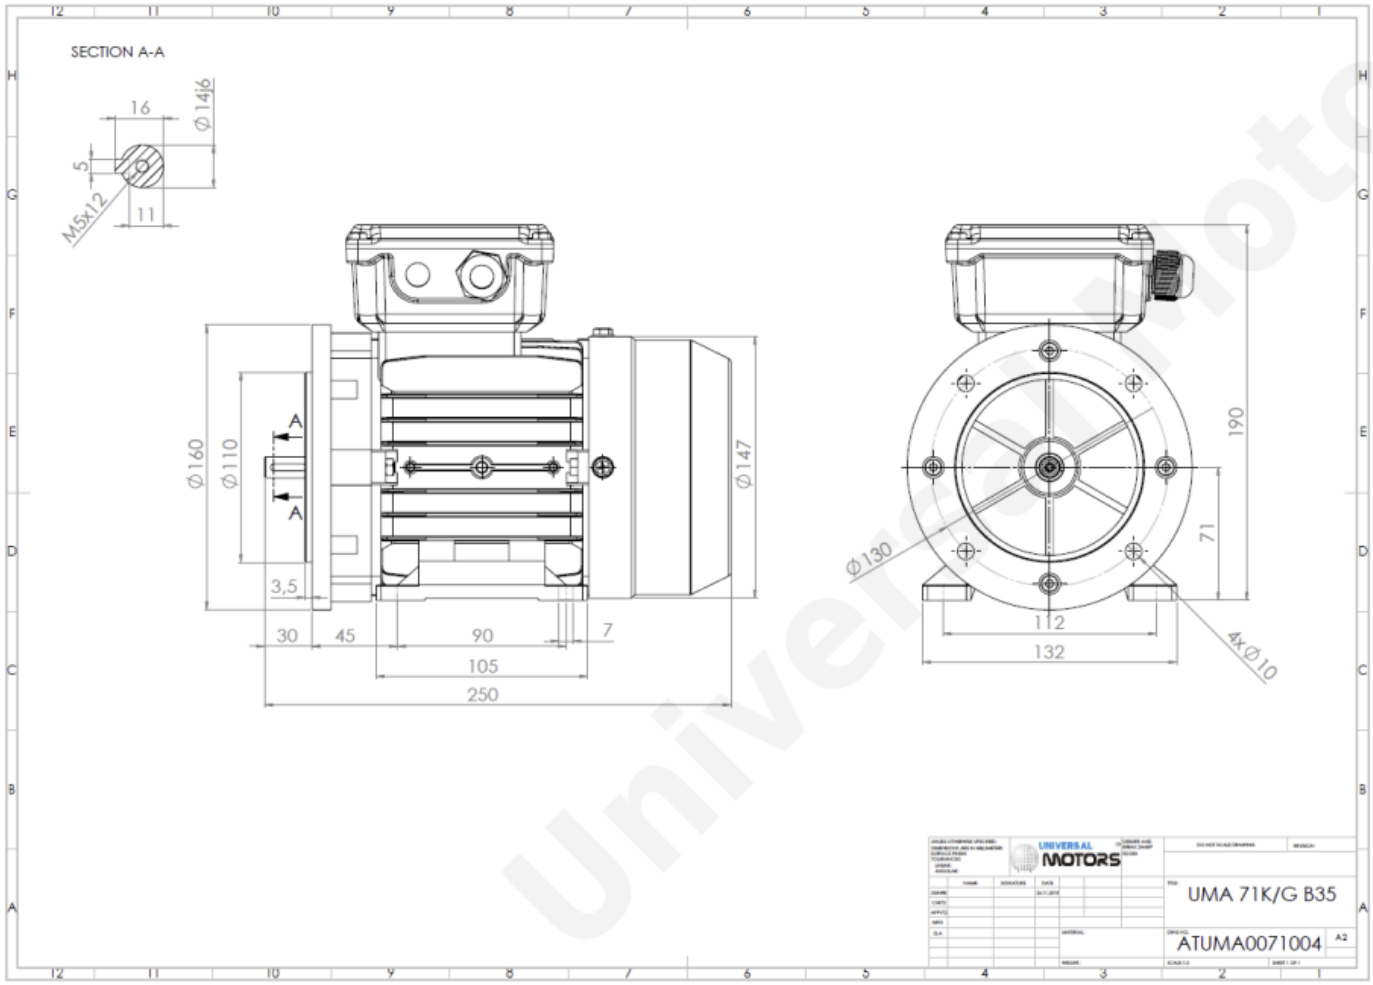

Motor type:	UMA 71G-2
Output:	0.55 kW / 0.75 Cv
Speed (min^{-1}):	2800 RPM
Voltage:	400 V
Frequency:	50 Hz
Current:	1.29 A
Power factor (Cos Ø):	0.82
Poles:	2
Insulation class:	F
Temperature rise Class:	B
Efficiency 100%:	76.0 %
Torque:	1.9 N.m
Tstarting/Tnominal:	2.2
Istarting/Inominal:	6.0
Tmaximum/Tnominal:	2.4
Noise:	64 Db(A)
Weight:	7.0 Kg
Bearing DE:	6202 2Z C3
Bearing NDE:	6202 2Z C3

Beatson Fans & Motors Ltd
0114 2449955
www.beatson.co.uk
sales@beatson.co.uk

Universal Motors