




TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame

UM3A 90L-4

1.5 kW / 2 Cv

1430 RPM

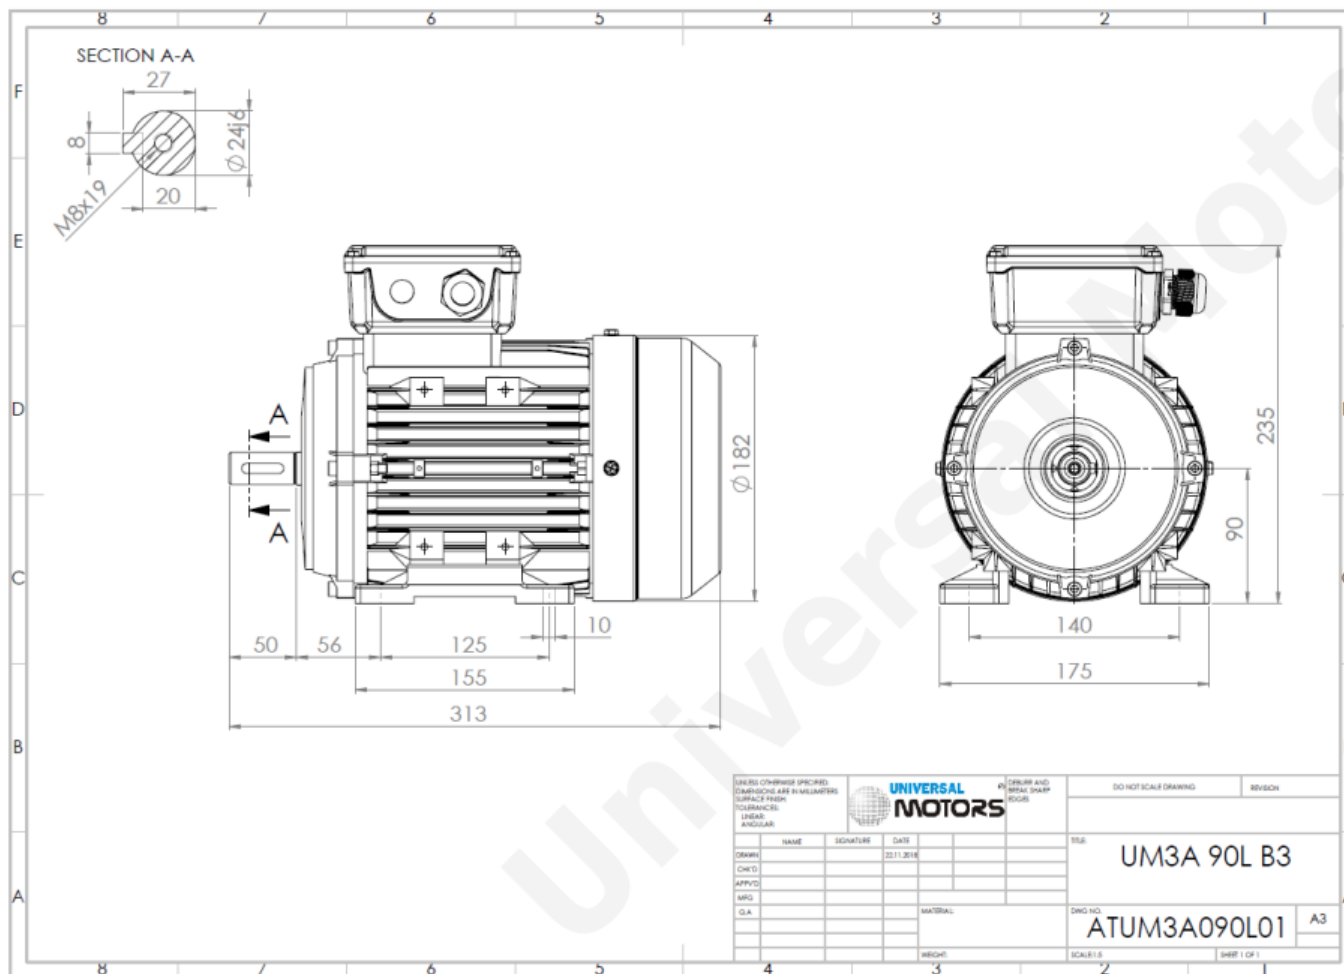

Motor type:	UM3A 90L-4
Output:	1.5 kW / 2 Cv
Speed (min^{-1}):	1430 RPM
Voltage:	400 V
Frequency:	50 Hz
Current:	3.4 A
Power factor ($\cos \phi$):	0.75
Poles:	4
Insulation class:	F
Temperature rise Class:	B
Efficiency 50%:	83.2 %
Efficiency 75%:	84.0 %
Efficiency 100%:	85.3 %
Torque:	10.0 N.m
Tstarting/Tnominal:	2.3
Istarting/Inominal:	6.9
Tmaximum/Tnominal:	2.3
Noise:	66 Db(A)
Weight:	17 Kg
Bearing DE:	6205 2Z C3
Bearing NDE:	6205 2Z C3

Beatson Fans & Motors Ltd
0114 2449955
www.beatson.co.uk
sales@beatson.co.uk