




TECHNICAL DATA

Three Phase Electric Motors - Aluminum Frame

UM3A 100L-2 IE3

3 kW / 4 Cv

2880 RPM

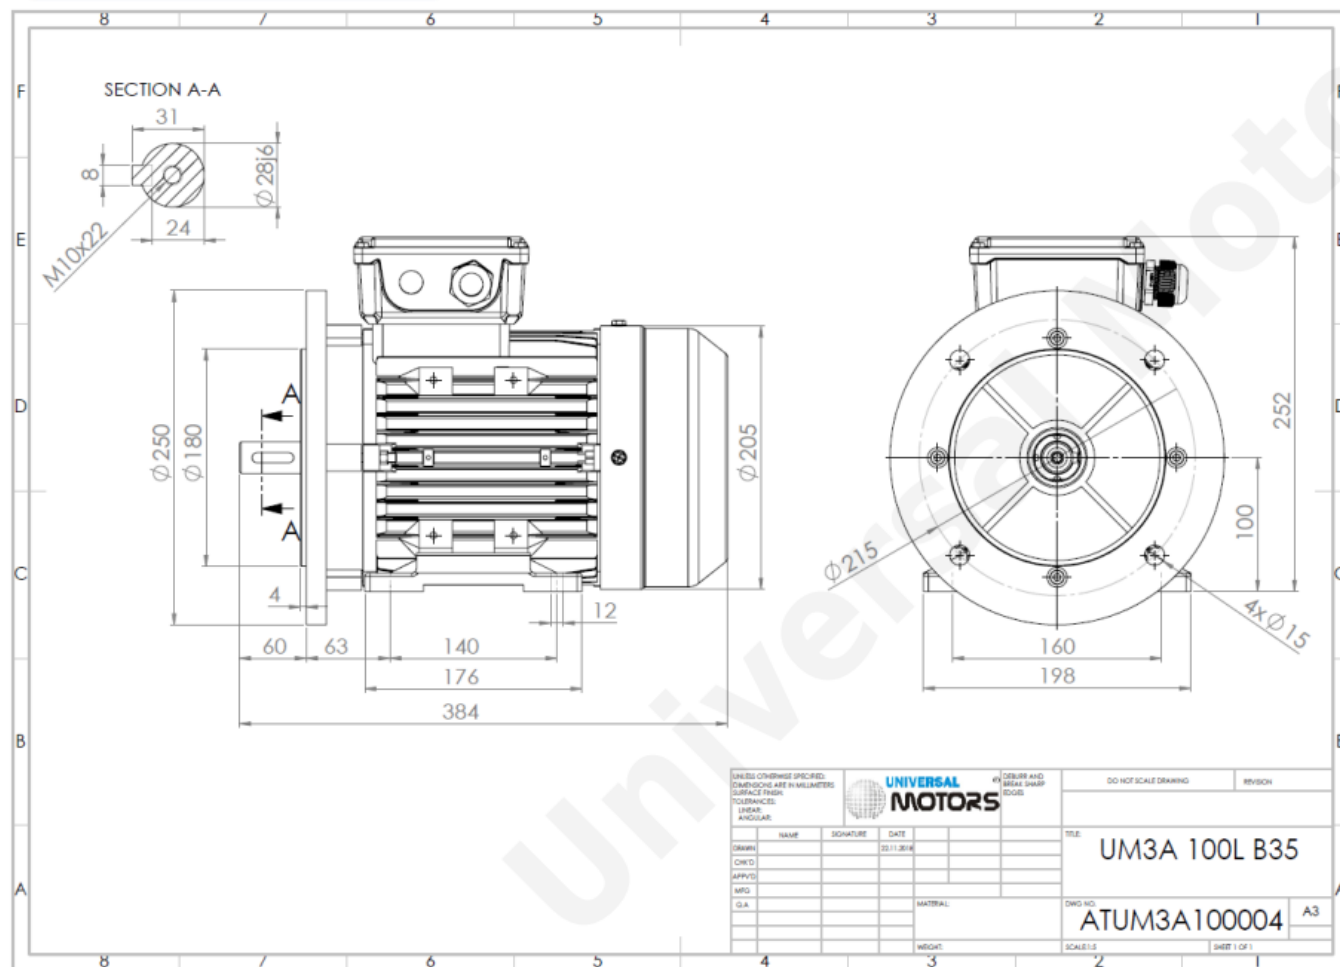

Motor type:	UM3A 100L-2 IE3
Output:	3 kW / 4 Cv
Speed (min ⁻¹):	2880 RPM
Voltage:	400 V
Frequency:	50 Hz
Current:	5.7 A
Power factor (Cos Ø):	0.87
Poles:	2
Insulation class:	F
Temperature rise Class:	B
Efficiency 50%:	84.9 %
Efficiency 75%:	85.8 %
Efficiency 100%:	87.1 %
Torque:	9.95 N.m
Tstarting/Tnominal:	2.3
Istarting/Inominal:	8.1
Tmaximum/Tnominal:	2.3
Noise:	82 Db(A)
Weight:	26 Kg
Bearing DE:	6206 2Z C3
Bearing NDE:	6206 2Z C3

Beatson Fans & Motors Ltd
0114 2449955
www.beatson.co.uk
sales@beatson.co.uk